

# TRILOGY

## FLOORING SPECS

Features	Benefits
12mil Wearlayer	Residential & Light Commercial
4 Sided Painted Bevel	Realistic Wood Appearance
Rigid Core Construction	Dimensionally Stable No T-Molds in Residential Install
FloorScore Certified	Product meets strict indoor air quality requirements
Varied Width Planks	Creates a unique, modern visual

### SPECIFICATIONS

<b>Dimensions:</b>	5.2mm thick x 5", 7", 9" varied width x 60" length
<b>Packaging:</b>	27.58 sf/ctn, 12 pcs/ctn, 36 ctn/plt, 992.88 sf/plt
<b>Construction:</b>	Waterproof Rigid Core with 1mm Pad Attached
<b>Wear Layer:</b>	12mil Polyurethane
<b>Warranty:</b>	25 Year Residential, 5 Year Light Commercial
<b>Installation:</b>	Angle/Angle
<b>Coordinating Trim:</b>	Waterproof - End Cap, Quarter Round, Reducer, Stair Nose and T-mold Available
<b>Gloss:</b>	Low
<b>Profile:</b>	4-Side Painted Bevel
<b>Pattern Repeat:</b>	1-6 Plank Visual



RADIANT HEAT  
APPROVED

\*hydronic  
systems only



WATER  
PROOF



NO EXPANSION  
MOLDINGS

up to 26' x 36'



floor  
score  
SCS certified



VARIED WIDTH



STOCKED  
IN KENT



TRILOGY  
COORDINATING TRIMS

# TRILOGY


## TRIM PROFILES & MEASUREMENTS

### TRIM DESCRIPTION


#### QUARTER ROUND

Applied to cover the expansion gap between the flooring and the wall.

### TRIM PROFILE




### TRIM DIMENSIONS





#### END CAP

Often times called Square Edge or Threshold, used when butting up to carpet or a sliding glass door.

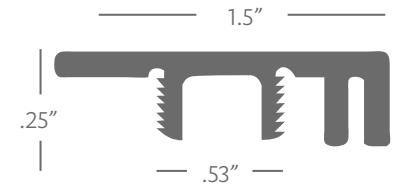



#### T-MOLD

Joins two floors of equal height, such as in a doorway, between two rooms or in a large area where the maximum length/width is exceeded.

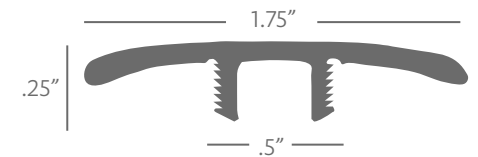

#### STAIR NOSE

Ends flooring at the top of either a landing or downward staircase.

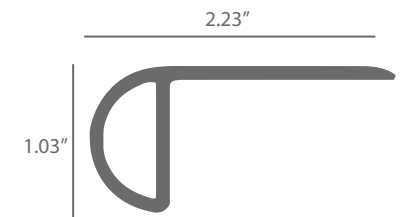

#### REDUCER

Ends the flooring onto a surface such as concrete.

