

LAMINATE 12 MM + 2 MM ATTACHED PAD

Collection	Classic Naturals
Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	7.72" Wide x 47.76" Long
Overall Thickness	12 mm (includes 2 mm IXPE pad)
Attached Pad	2 mm IXPE Sound Abatement Pad
Wear Surface	AC4
Texture	Embossed in Register
Edge Profile	4-Sided Painted, Waxed Bevel
Packaging	15.371 sf/carton - 65 cartons/pallet - 999.1 sf/pallet

Installation & Maintenance

Angle / Drop & Tap

Transition: Transitions required for rooms larger than 4,000 sq.ft.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Dust mop or vacuum for general cleaning, damp cleaning & steam mopped approved. No spray mops, power cleaners or buffers.

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

Greenguard Gold

Carb Phase 2 Compliant

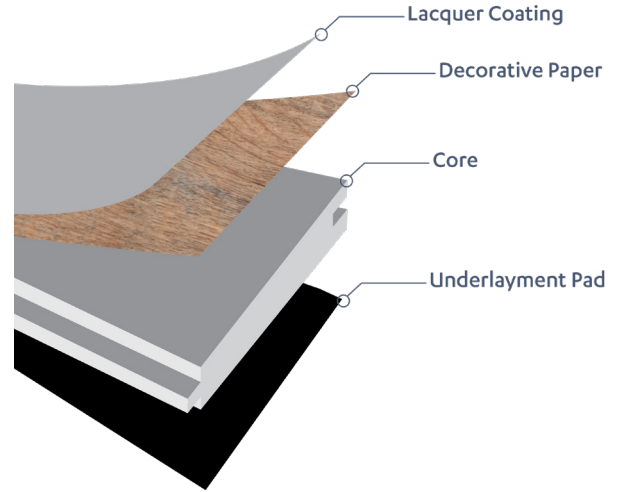


Warranty

15 Yr Commercial, Lifetime Residential,
72-Hour Topical Moisture

Accessories:

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

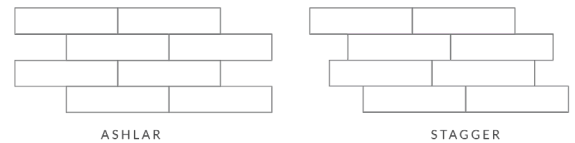

72-Hour Topical

LAMINATE 12 MM + 2 MM ATTACHED PAD

Collection	Hearthside
Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	6.57" Wide x 47.76" Long
Overall Thickness	12 mm (includes 2 mm IXPE pad)
Attached Pad	2 mm IXPE Sound Abatement Pad
Wear Surface	AC4
Texture	Embossed in Register
Edge Profile	4-Sided Painted, Waxed Bevel
Packaging	15.296 sf/carton - 55 cartons/pallet - 841.3 sf/pallet

Installation & Maintenance

Angle / Drop & Tap

Transition: Transitions required for rooms larger than 4,000 sq.ft.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Dust mop or vacuum for general cleaning, damp cleaning & steam mopped approved. No spray mops, power cleaners or buffers.

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

Greenguard Gold

Carb Phase 2 Compliant

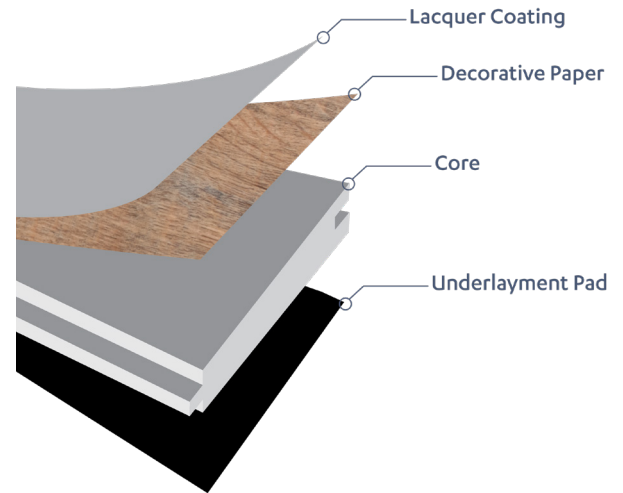


Warranty

15 Yr Commercial, Lifetime Residential,
72-Hour Topical Moisture

Accessories:

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

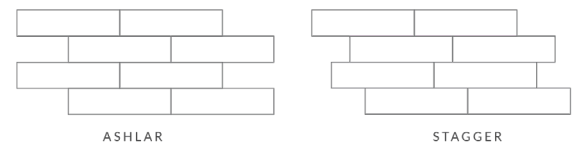

72-Hour Topical

LAMINATE 12 MM + 2 MM ATTACHED PAD

Collection	Vintage
Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	5.67" Wide x 47.76" Long
Overall Thickness	12 mm (includes 2 mm IXPE pad)
Attached Pad	2 mm IXPE Sound Abatement Pad
Wear Surface	AC4
Texture	Embossed in Register
Edge Profile	4-Sided Painted, Waxed Bevel
Packaging	13.186 sf/carton - 66 cartons/pallet - 870.27 sf/pallet

Installation & Maintenance

Angle / Drop & Tap

Transition: Transitions required for rooms larger than 4,000 sq.ft.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Dust mop or vacuum for general cleaning, damp cleaning & steam mopped approved. No spray mops, power cleaners or buffers.

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

Greenguard Gold

Carb Phase 2 Compliant

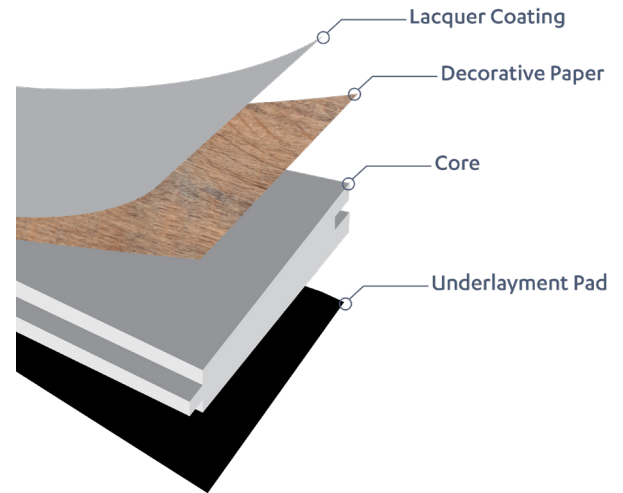


Warranty

15 Yr Commercial, Lifetime Residential,
72-Hour Topical Moisture

Accessories:

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

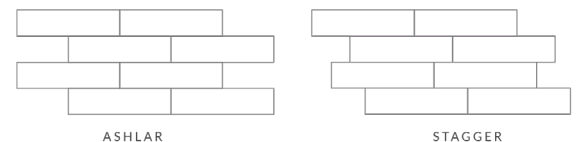

72-Hour Topical

LAMINATE 12 MM + 2 MM ATTACHED PAD

Collection	Monticello
Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	3.6", 5.7", 7.7" Wide x 47.76" Long
Overall Thickness	12 mm (includes 2 mm IXPE pad)
Attached Pad	2 mm IXPE Sound Abatement Pad
Wear Surface	AC4
Texture	Embossed in Register
Edge Profile	4-Sided Painted, Waxed Bevel
Packaging	22.561 sf/carton - 39 cartons/pallet - 879.9 sf/pallet

Installation & Maintenance

Angle / Drop & Tap

Transition: Transitions required for rooms larger than 4,000 sq.ft.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Dust mop or vacuum for general cleaning, damp cleaning & steam mopped approved. No spray mops, power cleaners or buffers.

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

Greenguard Gold

Carb Phase 2 Compliant

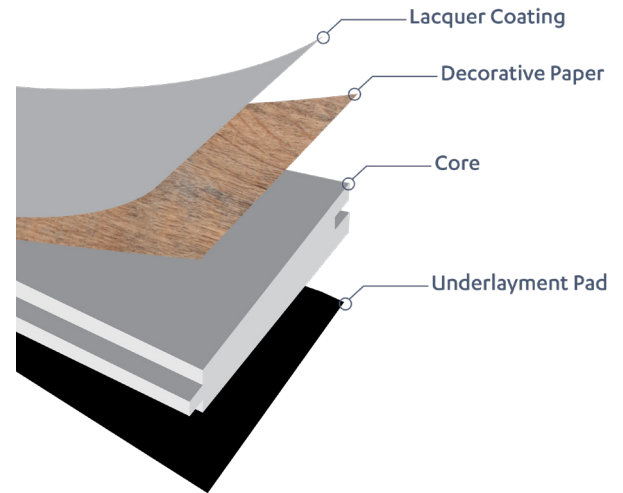


Warranty

15 Yr Commercial, Lifetime Residential,
72-Hour Topical Moisture

Accessories:

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

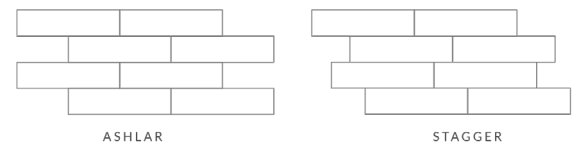

72-Hour Topical

LAMINATE 12 MM + 2 MM ATTACHED PAD

Collection	Boutique
Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	5.7", 6.6", 7.7" Wide x 47.76" Long
Overall Thickness	12 mm (includes 2 mm IXPE pad)
Attached Pad	2 mm IXPE Sound Abatement Pad
Wear Surface	AC4
Texture	Embossed in Register
Edge Profile	4-Sided Painted, Waxed Bevel
Packaging	13.186 sf/carton - 66 cartons/pallet - 870.27 sf/pallet
Cincinnati*	15.296 sf/carton - 55 cartons/pallet - 841.28 sf/pallet
Burned Pine*	15.371 sf/carton - 66 cartons/pallet - 841.28 sf/pallet

Installation & Maintenance

Angle / Drop & Tap

Transition: Transitions required for rooms larger than 4,000 sq.ft.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Dust mop or vacuum for general cleaning, damp cleaning & steam mopped approved. No spray mops, power cleaners or buffers.

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

Greenguard Gold

Carb Phase 2 Compliant

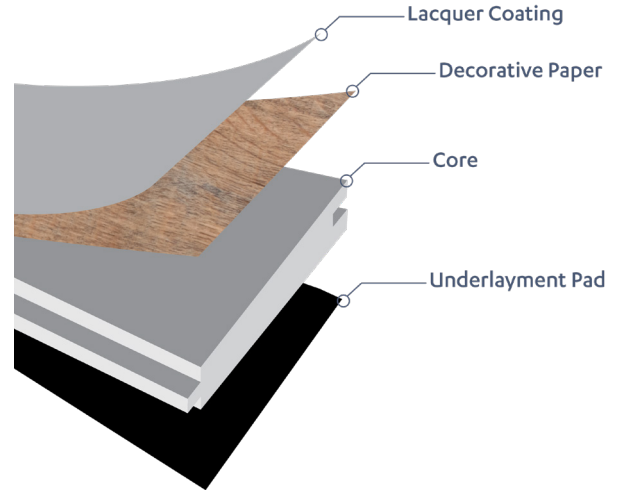


Warranty

15 Yr Commercial, Lifetime Residential,
72-Hour Topical Moisture

Accessories:

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

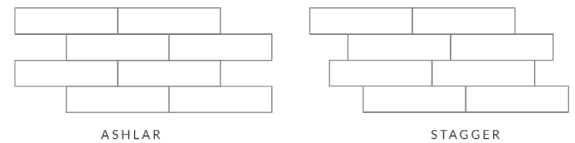

72-Hour Topical

LAMINATE 12 MM + 2 MM ATTACHED PAD

Collection	Elegance
Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	7.7" Wide x 47.76" Long
Overall Thickness	12 mm (includes 2 mm IXPE pad)
Attached Pad	2 mm IXPE Sound Abatement Pad
Wear Surface	AC4
Texture	Embossed in Register
Edge Profile	4-Sided Painted, Waxed Bevel
Packaging	15.371 sf/carton - 65 cartons/pallet - 999.1 sf/pallet

Installation & Maintenance

Angle / Drop & Tap

Transition: Transitions required for rooms larger than 4,000 sq.ft.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Dust mop or vacuum for general cleaning, damp cleaning & steam mopped approved. No spray mops, power cleaners or buffers.

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

Greenguard Gold

Carb Phase 2 Compliant

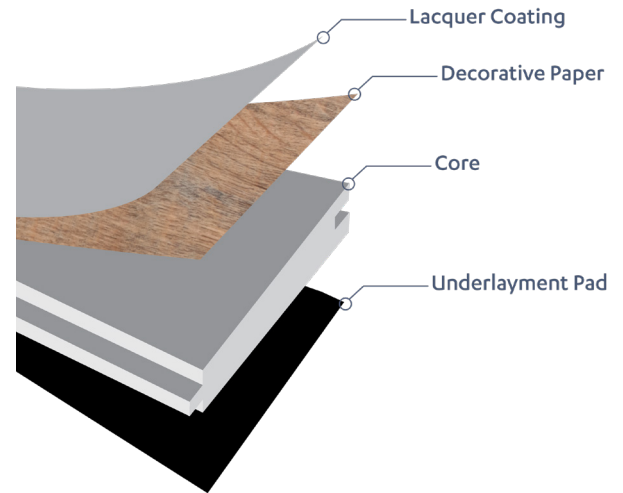


Warranty

15 Yr Commercial, Lifetime Residential,
72-Hour Topical Moisture

Accessories:

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

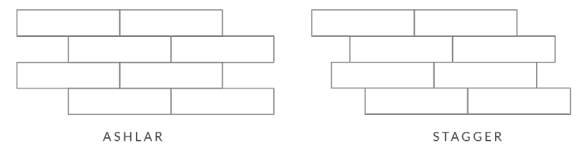

72-Hour Topical